

Hampton Entrance Doors

All our Doors are made in the Netherlands. We have more than a thousand different door models including interior doors and exterior doors. Entrance doors are produced from Merbau Hardwood timber. Each design is confirmed with technical drawings. Wood is carefully kiln dried to a specific moisture content to ensure that it will reach optimum stability and durability. This process takes place in our own factory based kiln dry facility so that we have 100% control at this critical stage.

Our main construction and connection method typically uses a wooden dowel system. This system has been proven to give the same results as more traditional methods like mortise and tenon but we find it more efficient. Whether interior or exterior joinery, light or heavy duty, we use only one type of glue, a D4 class two component glue system. Using this type of glue system will ensure the strength and durability of the joinery.

Our standard operating procedure requires regular checking throughout our production process and after completion making sure that your product is delivered to the highest standards.

Index

Glass & Panelled	3 - 6
Modern	6 - 7
Panelled	7 - 8
Farm / Stable	8
Front Face Wrought Iron	9
Wrought Iron Window Openable	9
Cast Aluminium Window Openable	9 - 10
Balcony Patio	10
Balcony Garden	10 - 11
Balcony Rear	11 - 12
Balcony Sets	12
Country Side Dutch	13
Upper Dutch	13
Lower Dutch	13 - 14
Full French	14 - 15
Half French	15 - 16
Louvres	16

Hampton Internal Doors

Our interior doors are produced using an engineered core with an MDF top layer and are supplied only primed in either white or black colours. These doors have a choice of different door and panel profiles and are available in 40mm thickness. 35mm thickness is available on request as not all profiles allow for the change in thickness to the door.

We also custom make door sizes up to 2500mm in Height and widths up to 1300mm

Index	
Internal	16 - 18
Modern Shaker	18 - 19
Industrial	19 - 20
Full French	20 - 21
Barn	21

Alan Millyard Entrance Collection

Our high thermal efficiency doors offer lots of advantages when compared to contemporary veneer or solid wood exterior doors. These doors are produced using an aluminium layer sandwiched between high quality exterior plywood. The core of the door consists of a hardwood framework around an extruded polystyrene sheet (XPS). The aluminium sheet acts as a water barrier to stop moisture penetrating the core of the door, to help prevent bowing or warping. The XPS sheet gives the door its high thermal efficiency. The hardwood frame can be ordered to a width to suit all hardware in the market today and also offers the possibility for re-sizing of the door.

Index

I mala se

Thermal Fixed Louvres

Glass & Panelled Entrance Doors



HD-10148



HD-10308



HD-10628





HD-10634

HD-10806





HD-10008



HD-10170



HD-10480









HD-10208

HD-10508

HD-10722



HD-10048



HD-10528





HD-10060



HD-10606

HD-10728

HD-11108





HD-10288





HD-10734



HD-11204







HD-11048



HD-11068

HD-11080

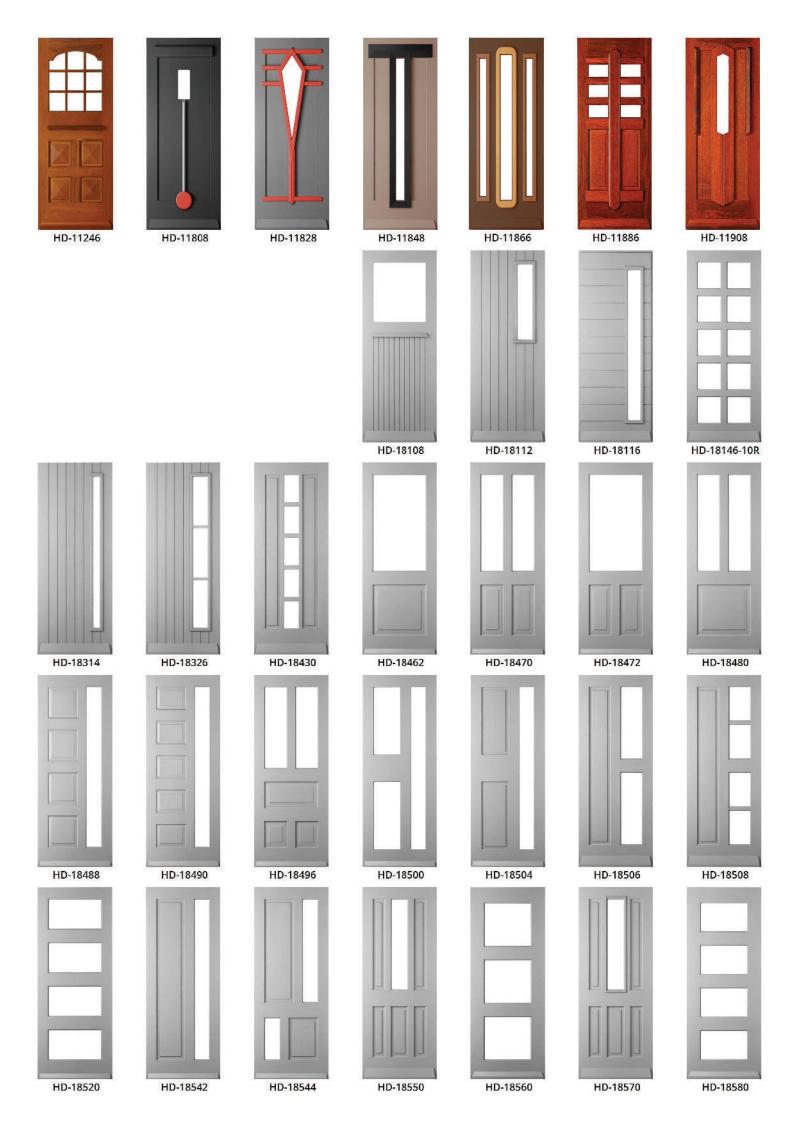

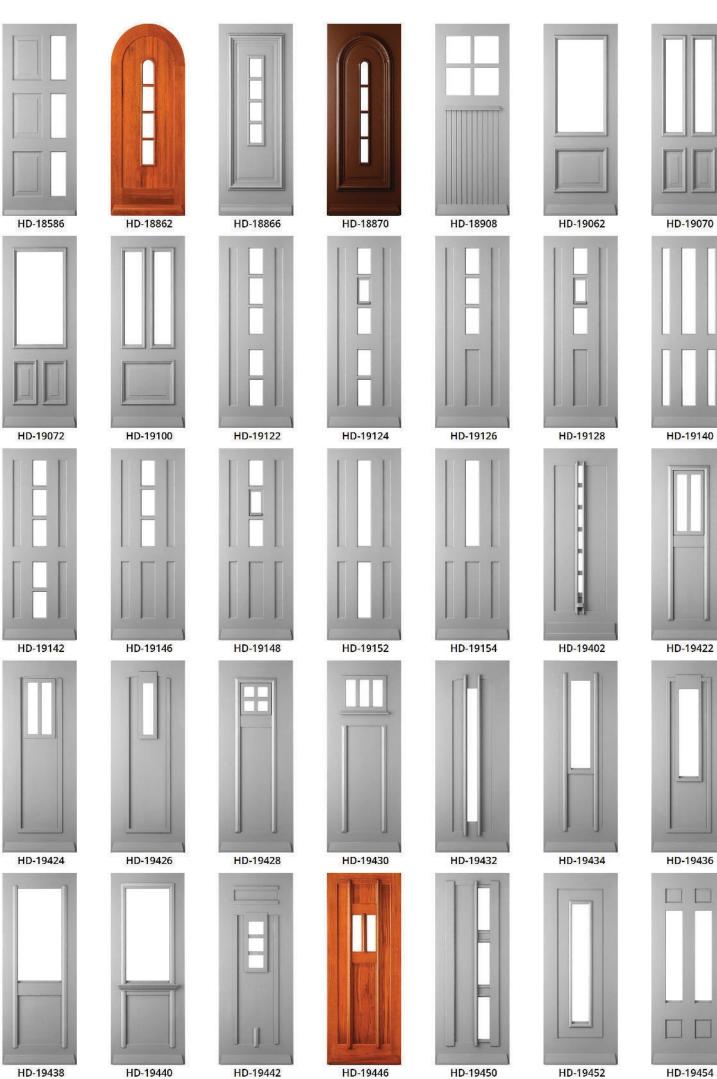

HD-19438

HD-19440

HD-19442

HD-19446

HD-19450

HD-19454



HD-M180

HD-M181

HD-M182

HD-M183

HD-M184

HD-M186







HD-18566

HD-19460

HD-19156

Farm / Stable Entrance Doors







HD-F8027





HD-F8034



HD-18572

Farm House



HD-F7097



HD-F8037



HD-18588



HD-19482

Vintage Diamond



HD-F7098



HD-19486

HD-F7091



HD-19078







HD-F7099



HD-F7100

HD-F8025

Front Face Wrought Iron <u>Entrance</u> Doors





Wrought

Window

Openable

Entrance

Doors

HD-32003

HD-10052

× + + × ~

Iron







HD-11051



Sultan



HD-10152




HD-10452





HD-19624



HD-31964


Cast Aluminium Window Openable Entrance Doors







HD-19628



HD-31979



HD-10012



HD-10392



HD-32006



HD-10112



HD-10412



HD-11050









HD-10432



HD-19626

HD-31973




HD-G273G

HD-G274G

HD-G404G

HD-G405G	HD-G414	HD-G418	HD-G530A6R	HD-G530A8R	HD-G530AF	HD-G660A6R
HD-G660A8R	HD-G660AF	HD-G791AF	HD-G920A4R	HD-G920A6R	HD-G1422	HD-G2722
HD-G4022	HD-G4186R	HD-G4188R	HD-G41810R	Balcony Doors Rear	/	HD-B181P
HD-B530A4R	HD-B530A6R	HD-B530A8R	HD-B530AF	HD-B531A6R	HD-B531AF	HD-B790A4R
HD-B790A6R	HD-B790AF	HD-B790AJ1	HD-B790AJ2	HD-B920AA	HD-B920AF	HD-B920BB



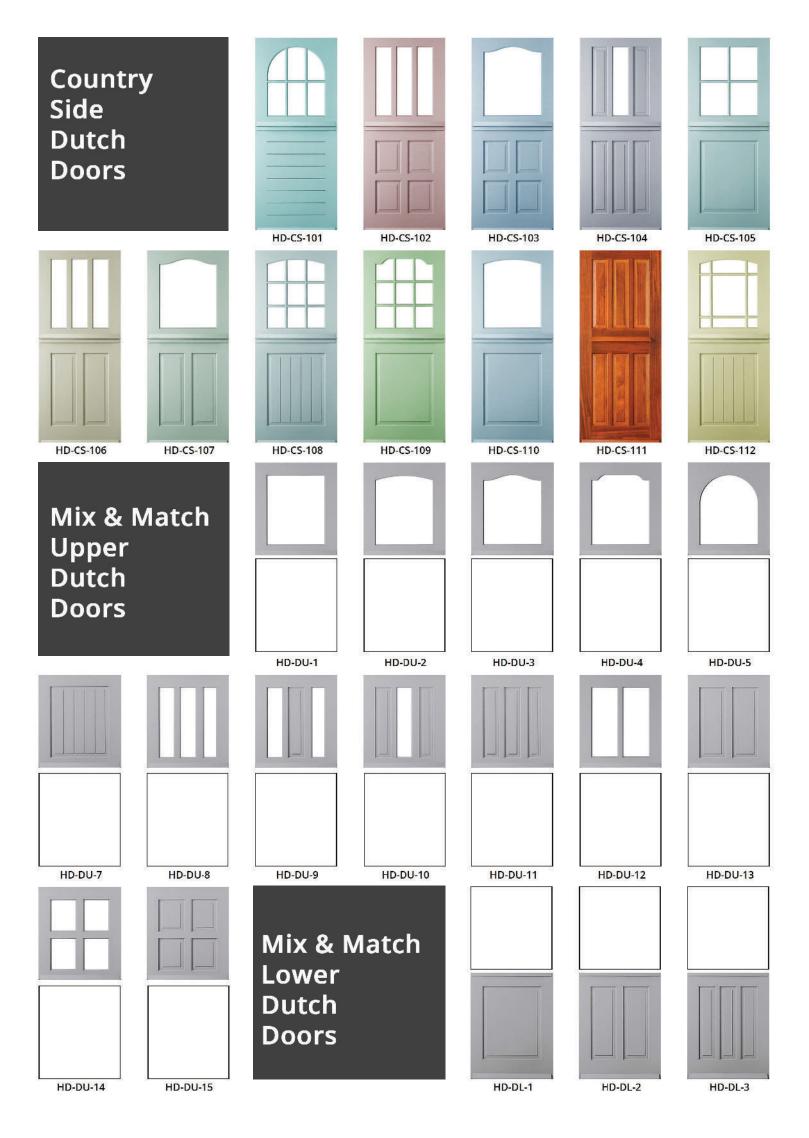





Full French Entrance Doors



HD-1030ASE



HD-3036ASE




HD-3626AFSE




HD-3636ASE





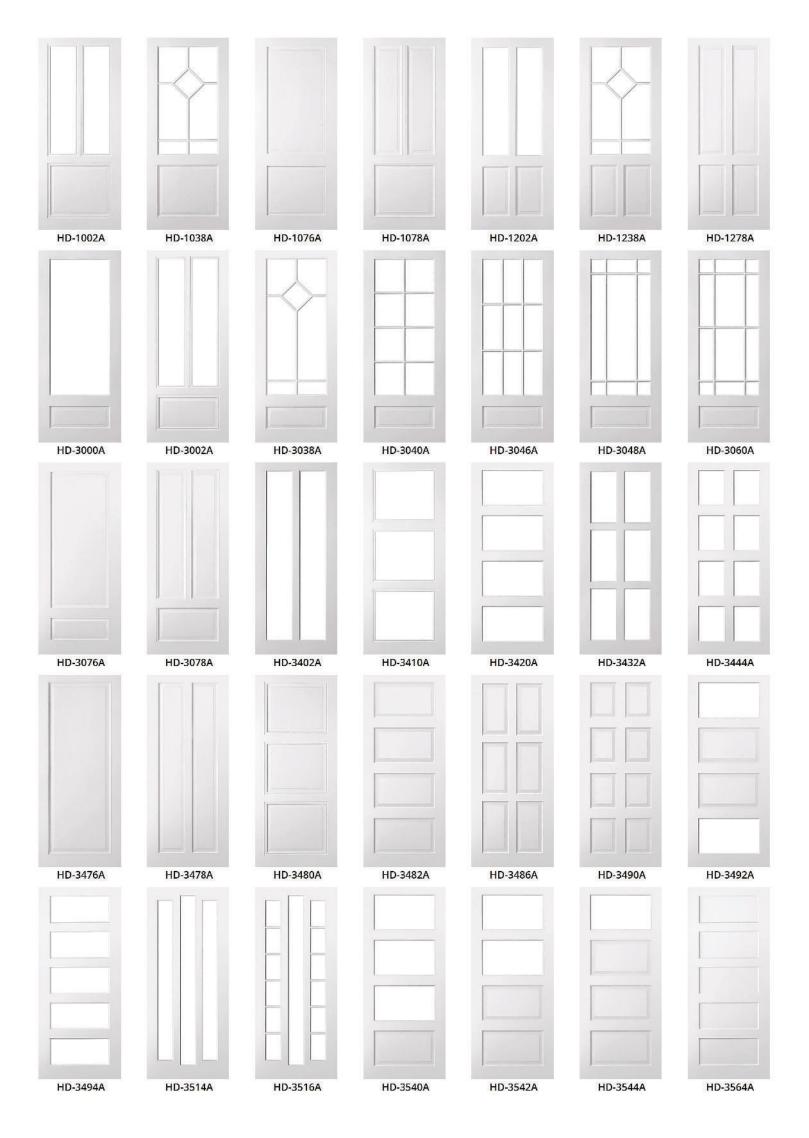





HD-3754A



HD-3532A





HD-3756A

HD-6000A

HD-3536A

1

HD-3646A



HD-6076A

HD-4884A

HD-6202A

HD-3694A

HD-4002AI



HD-5086A



HD-3696A







HD-3700A

HD-5800A HD-5278A40

Modern Shaker Internal Doors

HD-6476A



HD-5166A







HD-5280A20



HD-5284A

HD-5410A

HD-5478A


HD-5478A40


HD-5480A

HD-5486A

HD-5600A




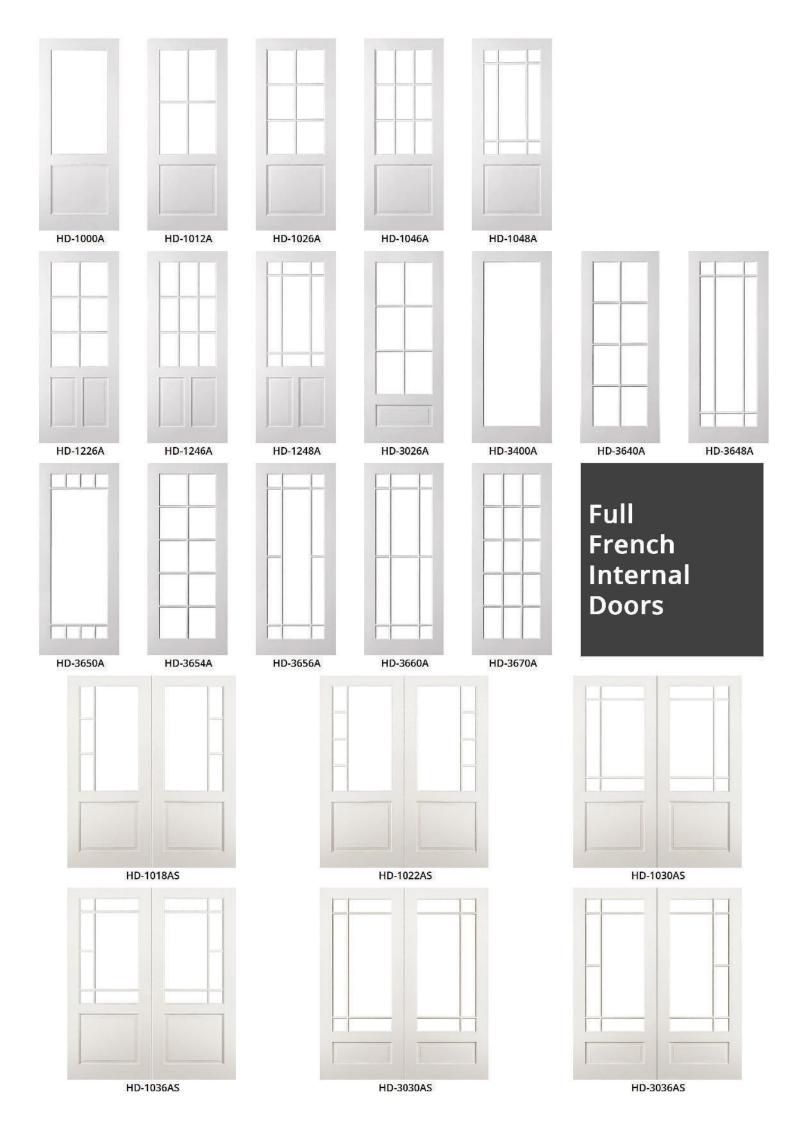

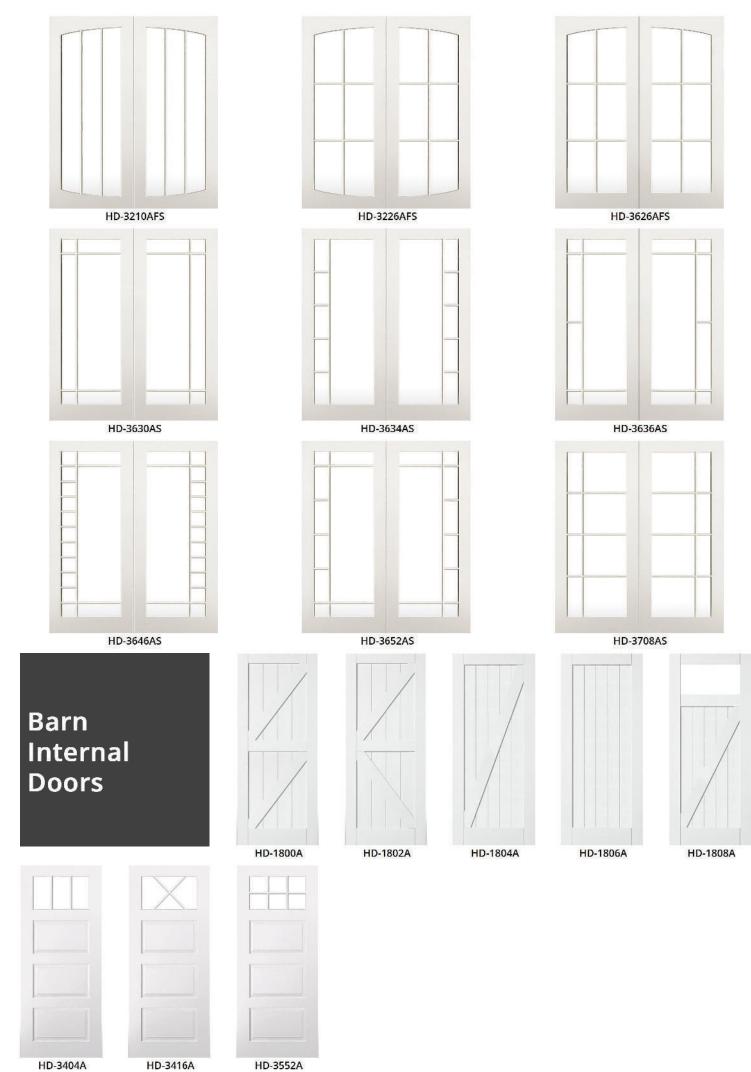

HD-3404A

HD-3416A

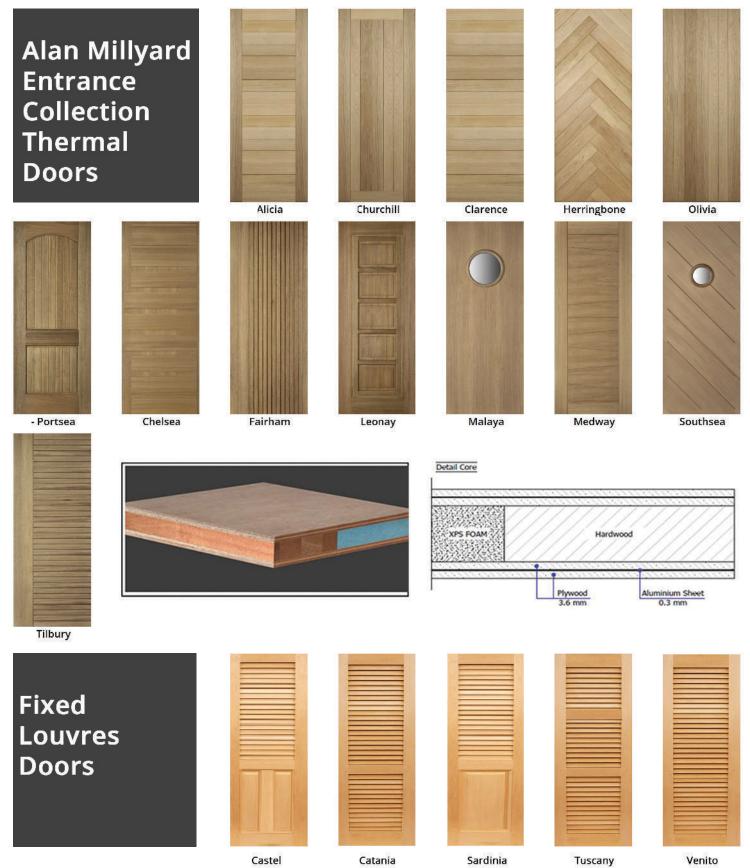

Castel

Catania

Sardinia

Venito

Hampton Doors

Sydney Showroom

10 Seville Street, North Parramatta NSW 2151

(02) 9613 3579

info@hamptondoors.com.au www.hamptondoors.com.au

Trading Hours

Monday	9:30am - 3:00pm
Tuesday	9:30am - 3:00pm
Wednesday	9:30am - 3:00pm
Thursday	9:30am - 2:30pm
Friday	9:30am - 3.00pm
Saturday	10.00am - 1.00pm
Sunday	Closed



HAMPTON DOORS WARRANTY TERMS & CONDITIONS

HAMPTON DOORS, will not be responsible for repainting, refinishing or similar actives involved & replacing of glass panels. Timber Doors HAMPTON DOORS, warrants to the original consumer the quality of workmanship & materials of timber items to be free from defects which may render the product unserviceable for six (6) years from date of purchase. To comply within Limited Warranty, it is the consumer's responsibility to properly care for & protect all timber products: * Immediately after fitting, & prior to hanging, the entire door, interior & exterior, top & bottom edges & hinge checkouts, must receive a minimum of two (2) coats of undercoat & two (2) coats of Oil paint or equivalent grade of recommended paint, vanish, or sealer to prevent undue absorption of moisture which may cause warping to occur. Acrylic, Water & Solvent based primer / paints or thinner are not suitable for treatment of Timber Doors. * Texture and colour variations do not constitute defects, as timber is a natural product. * Doors must be stored flat, in a dry place, avoid freshly plastered rooms or other damp areas, and not in direct sunlight. * All doors are supplied unfinished. * Regular maintenance to prevent breakdown and exposure to the element should be provided to prevent deterioration. * Doors must be inspected upon arrival for visible defects and all claims based thereon must be filled within seven (7) days. No warranty applied if the door has been altered. * A change in climatic condition can cause slight movement in the component of some solid timber doors, these are not considered a defect. * Warping refers to distortion within the door itself and not to its relationship to the doorjamb or frame in which it is hung. Warp exceeding 5mm shall be considered a defect. **HAMPTON** DOORS, agrees to repair or replace at its option, unfinished and in the form originally supplied and without charge, any door found to be defective within the meaning of the warranty. HAMPTON DOORS, or the Seller will not be held responsible for charges of hanging, painting or other charges arising from the replacement of doors. HAMPTON DOORS, recommends that if your door receives direct sunlight it should be painted in a LIGHT reflective colour, DARK colours may cause shrinkage due to change of moisture content. LIGHT coloured paint is a more durable finish for harsh conditions. *All Entrance doors must be hung in a Weather Protected areas. Water damage will void our warranty. * We recommend that a minimum of 3 hinges to be used on Standard Entrance Doors and 4 hinges on all oversized Doors. * Door profiles can change without notice due to Stock availability. Every effort will be made to maintain our Standard profiles. This will not be considered a defect. Solid Timber Joinery Doors have Solid timber Styles, Rails and Mullions with laminated timber or MDF veneered fielded panels Engineered Joinery doors use veneered laminated timber styles, rails & mullions with veneered MDF fielded panels. Suitable for either paint or stain. (For internal use Only) Experience has demonstrated that warp occurs after doors have been delivered to storage or building sites, it is usually due to improper storage or adverse moisture conditions after hanging & not to faulty manufacture. The manufacturer will accept no responsibility for doors when moisture content of the timber falls below 10% or exceeds 16%. Colour Photograph as shown in this catalogue do not always reflect the actual true colours. All Factory glazed doors comply with Australian Glazing Standard AS 1288-2006

EXCLUSIONS The guarantee against warp does not apply to the following *35mm and 40mm thick doors wider than 920mm or higher than 2140mm *Doors that are improperly hung or do not swing freely. *External doors which have been painted dark colours or different colours on each face.

MAXIMUM ALLOWABLE TRIMMING OF DOORS 10mm each side from solid constructed joinery engineered doors 30mm each side from solid timber joinery doors with 130mm styles 20mm each side from solid timber joinery doors with 110mm styles 30mm from either the Top or Bottom rails Anything outside the above please consult with HAMPTON DOORS.

Pictures are for illustration purposes only, doors do not include letterboxes, handles, extra hardware, paint, intallation etc.

www.hamptondoors.com.au